

Ī 4ì x

¿ d	£ 3 š	À 1 š	£ Ü š	Ô I
~ ... v g/ Zh	-	-	0.029 A ² s	< G I k -ê "g Õ Ñ o h k / V Q / V Q k 4 Õ ž • # f Y z ! Õ Ñ @ f ~ ... v ¼ ž
ä œ f	0.9	-	-	220-240Vac, 50-60Hz, 70%-100% ž ú
È ´ f â 1	-	-	12%	g d = h

Ī p4ì x

¿ d	£ 3 š	À 1 š	£ Ü š	Ô I
ÿ ß 9 ð †	-5%Vo	-	5%Vo	ž ú
È ÿ ß 9 ¼ f (pk-avg) EBV-048S024SVF EBV-048S036SVF EBV-048S048SVF	- - -	- - -	2.0 V 2.5 V 2.5 V	ž ú ož " P f ~ 3 . ` k ! Ú ^ k ÿ ß w Ä f , G - ì y f , † ož
o ï 9	-	-	5%Vo	ž ú
ž Å² ... ä	-	-	±1%	ž ú
ž ú² ... ä	-	-	±3%	
• Ñ o ž •	-	-	0.5 s	< G I k 100% ž ú
Á € •	ÿ ß ž [-	8%Vo	ž • ' ž • y 1 A/µs
	ú 3 ž •	-	10 ms	ž ú y 25% ~ 100% ž ú
" † © f	-	0.03%/ ¢	-	Ó " = 0 ¢ ~ Tc Á Ý ›

I u ñ Æ Å @ f ® " † q Õ Ñ ñ O y Á ° > k Ô ð h ¢ " Û ož

P á é

¿ d	£ 3 š	À 1 š	£ Ü š	Ô I
ä @220Vac: EBV-048S024SVF EBV-048S036SVF EBV-048S048SVF	83.0% 84.5% 86.0%	85.0% 86.5% 88.0%	- - -	ž ú k q ê "
u ® — { ž ž •	-	871,000 Hours	-	< G I k ê " -k ž ú 3/2 . * (1 ,
. x ž •	-	104,000 Hours	-	< G I k ž ú k Ó " -k ! Õ Ñ @ f . x ¼ ž

P á é


? d	£ 3 š	À 1 š	
-----	-------	-------	--

μ Ô Â × Ô


EMS × Ô	Ô I
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

I u g h › á +3/ ö Ö k x 9 › • ° À © Ī %² B ã k - È ` ° À Ä € — Ö g +3/ , ¼ G • ož


` › • Ž

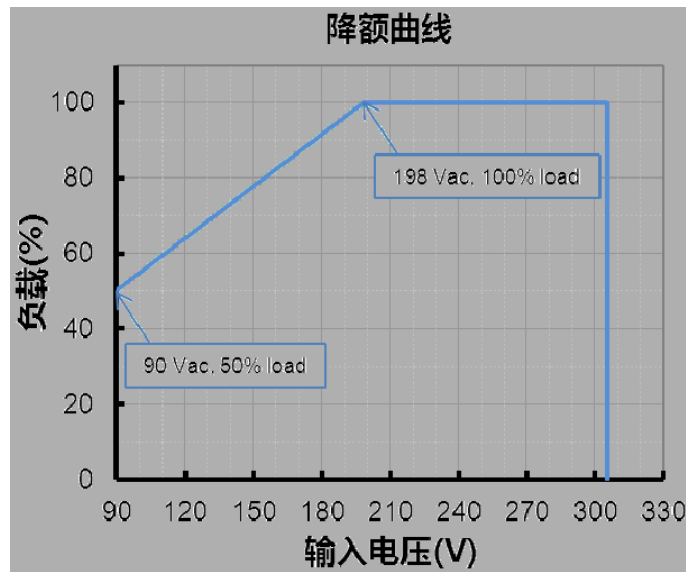

- w * Ô t • Ž

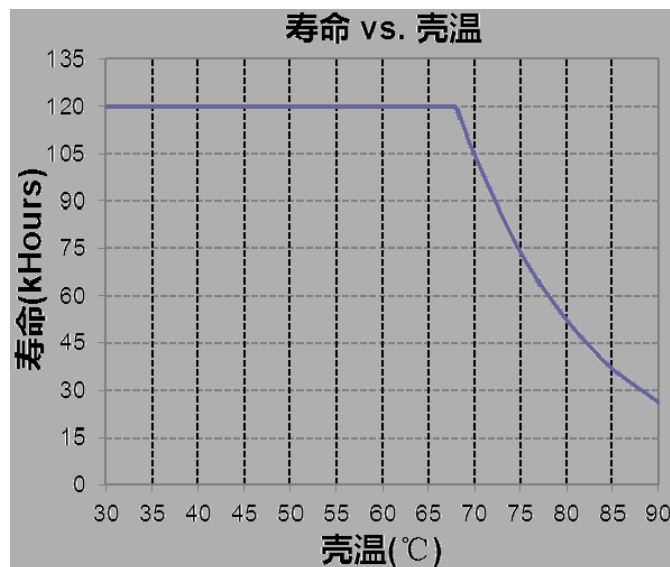


_f•Ž

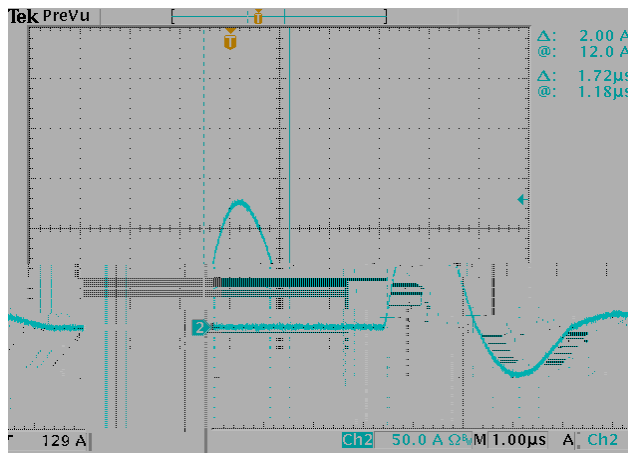


]’•Ž


EBV-048S024SVF
效率 vs. 输出电流

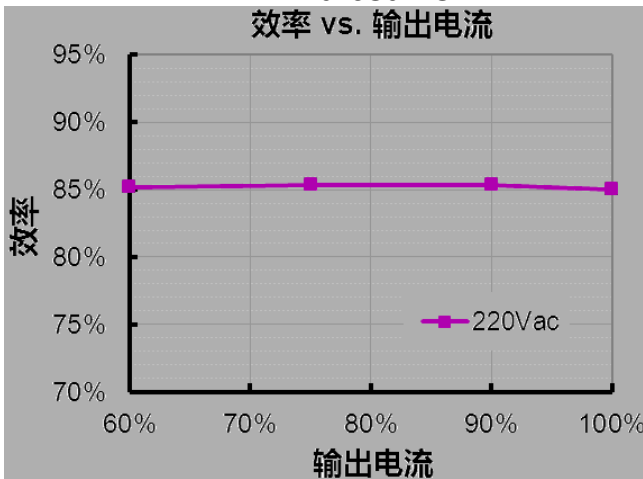


EBV-048S036SVF
效率 vs. 输出电流

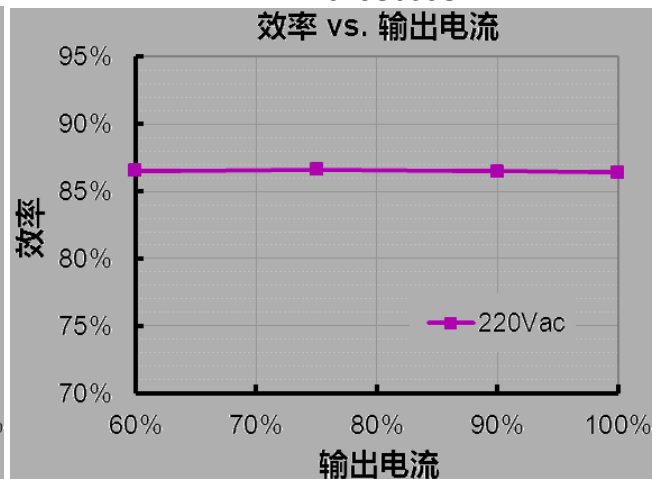


EBV-048S048SVF

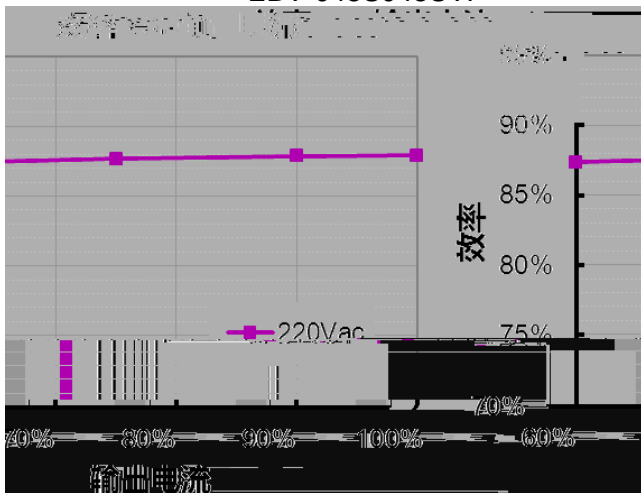

↳ d • Ž

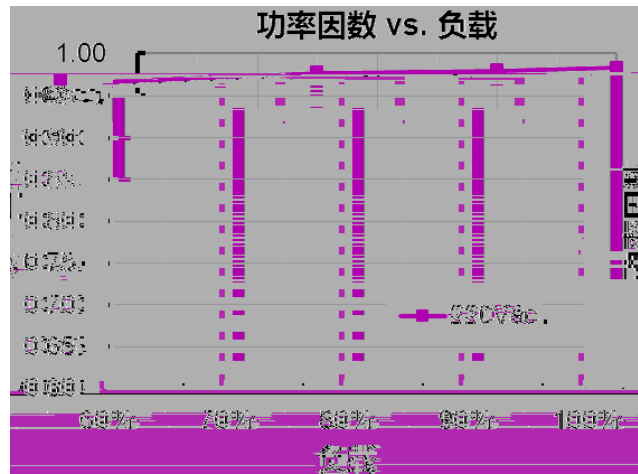

5 f G á • Ž

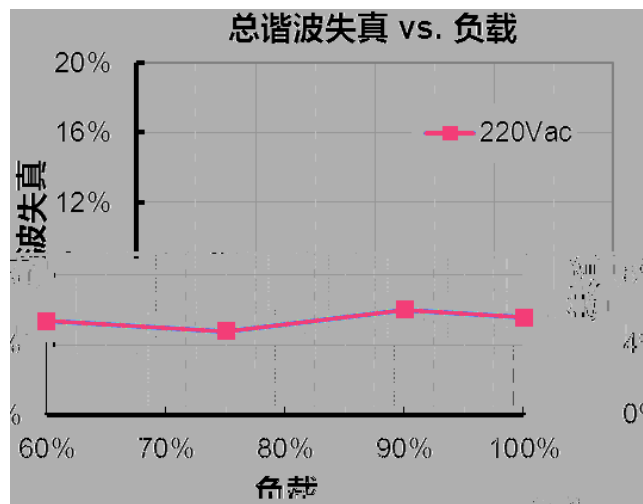




• õ x

¿ d	Ô I
v ´	Ê Ö % "ož { ž L " ž k Ê Öož
9 ´	ý ß 9 k ' ò " • 8 Äož
? è ´	Ê Ö % "ož ? è ž k D } — C oož ? è L " ž k U Ê Öož
" "	Ê Ö % "ož " † " ž k U Ê Ö 3 oož

2 Å ç

ÿ µ (H05RN-F 3*1mm² Ø7.2)

ÿ ß (H05RN-F 2*1mm² Ø6.8)

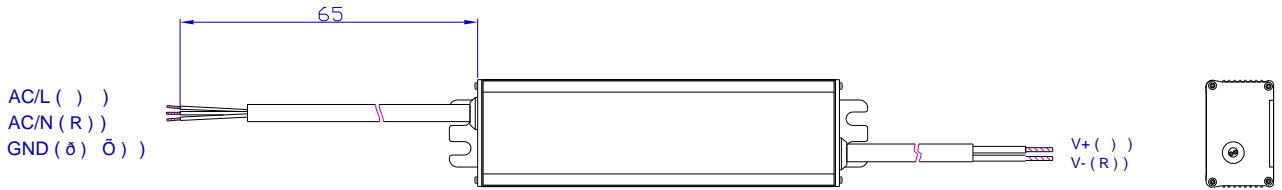

PROJ:

ì h ç , [: ±1

' [b ç

' X • N	• -	' X 5 é		
		• ù	Q	è
2019-07-30	A	G g		
2019-08-09	B	° Z ç n Õ h	g h • š 98 y < G lož	g h))) • š 98 y < G I! "))) \$ Û • š 9 8 y < G lož
		Ñ ã £		¾ •