


- O) %%
- 
- +bM# - bM
- 
- @- LC
- J < CM
- : @j @; imj if e )
- ,

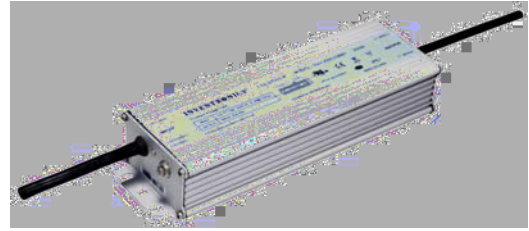

<L M\$ ' ' JxxxJK

) ' ' N

O' \$\* ' , Mac

	1			2			3
					110Vac	220Vac	
12 Vdc	90 ~ 305 Vac	0~15.0 A	180 W	91.0%	0.99	0.97	EUV-200S012ST
24 Vdc	90 ~ 305 Vac	0~8.33 A	200 W	92.0%	0.99	0.97	EUV-200S024ST
36 Vdc	90 ~ 305 Vac	0~5.56 A	200 W	92.0%	0.99	0.97	EUV-200S036ST
42 Vdc	90 ~ 305 Vac	0~4.76 A	200 W	92.5%	0.99	0.97	EUV-200S042ST
48 Vdc	90 ~ 305 Vac	0~4.17 A	200 W	92.5%	0.99	0.97	EUV-200S048ST
54 Vdc	90 ~ 305 Vac	0~3.70 A	200 W	92.5%	0.99	0.97	EUV-200S054ST

( LC ( ' ' \$) . . Mac2 ( ' ' \$) + ' Mac BJ  
 ) ) ' Mac#( ' ' %  
 \* J < CM

	O' Mac	\$	* ' , Mac	
	+ . ? z	\$	- * ? z	
	\$	\$	0.75 MIU	LC / . , ' 2) . . Mac&- ' ? z
	\$	\$	0.70 mA	@: - ' , O/ \$( 2) + ' Mac&- ' ? z

	-	-	2.5 A	( ' ' % ( ' ' M̄ac
	-	-	1.1 A	( ' ' % ) ) ' M̄ac
@k	-	-	1.5 A²s	) ) ' M̄ac ) , ( ' % \$( ' % = ( % d J
	0.90	-	-	( ' ' ~ ) . . M̄ac , ' \$ ' ? z ( ' ' %
	-	-	20%	


	-2.5%		2.5%	EUV-200S042ST, ( ' ' %
	-5%	-	5%	#( ' ' %
gb\$gb	-	-	2% V <sub>o</sub>	) ' D ? z ' % l = ( ' l =
	-	-	10%	
	-	-	1%	( ' ' %
	-	-	2%	
	-	0.9 s	1.5 s	(( ' M̄ac ( ' ' %
	-	0.5 s	1.0 s	) ) ' M̄ac ( ' ' %
	-	-	5% V <sub>o</sub>	& 1( 8 & J
	-	-	10 mS	1) , % ~ . , %
	-	0.05%/°C	-	=0°C~Kc







@110Vac				
V <sub>o</sub> = 12 V	88.0%	89.0%	-	( ' ' % ) , ° ( %
V <sub>o</sub> = 24 V	89.0%	90.0%	-	
V <sub>o</sub> = 36 V	89.0%	90.0%	-	
V <sub>o</sub> = 42 V	89.5%	90.5%	-	
V <sub>o</sub> = 48 V	89.5%	90.5%	-	
V <sub>o</sub> = 54 V	89.5%	90.5%	-	









EMS	
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV <sup>(2)</sup>
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Ž ž <D @ Ž ž <D @  
 Ž ž # & Ž ž  
 Ž @: -', O/\$( ' %ž

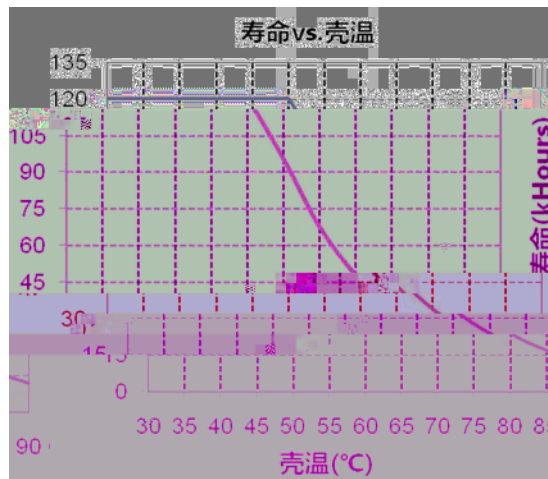

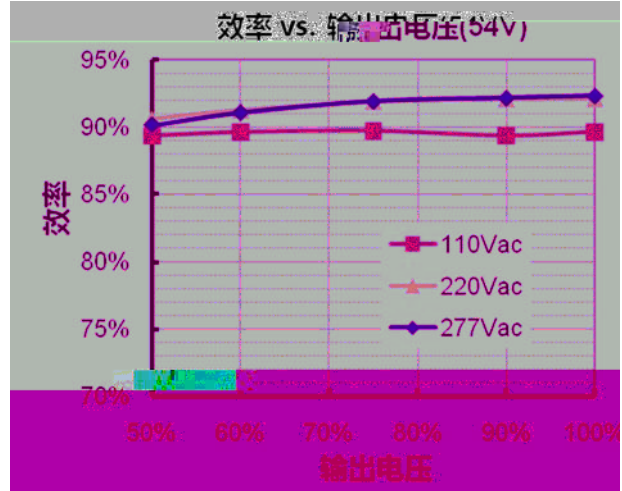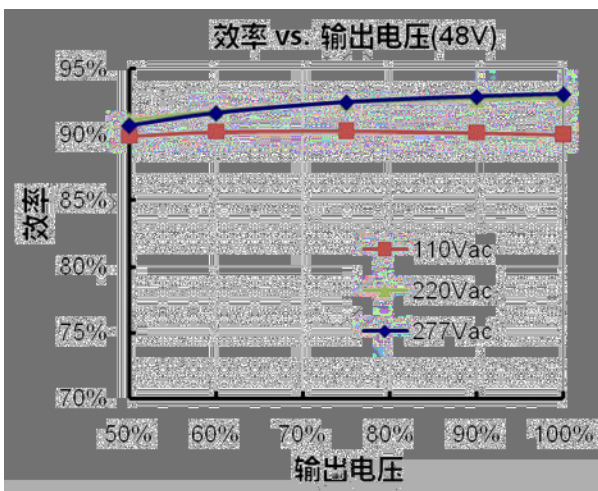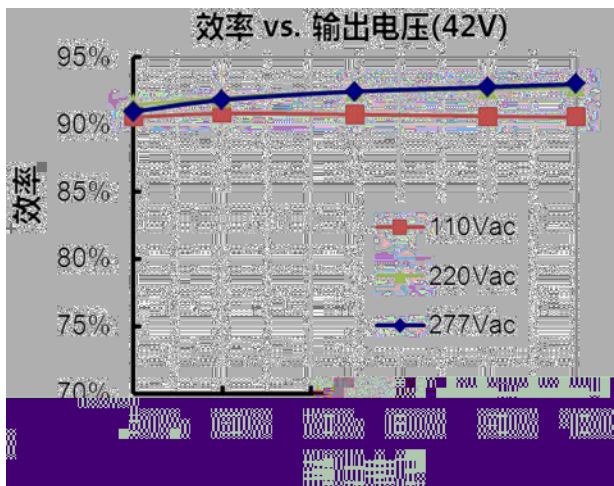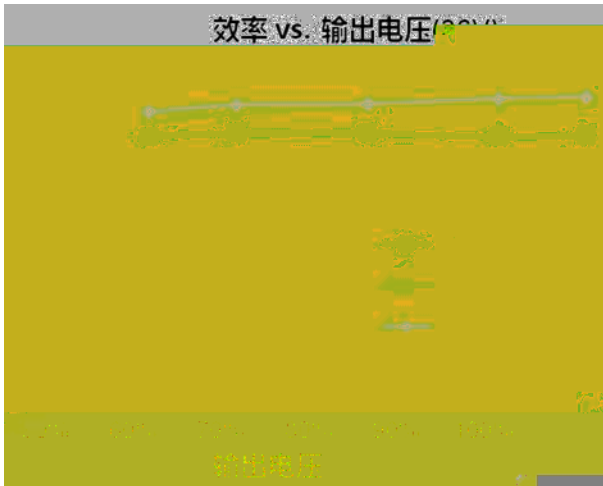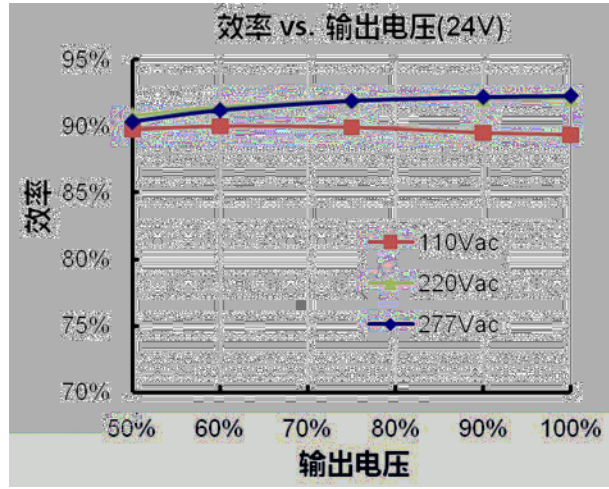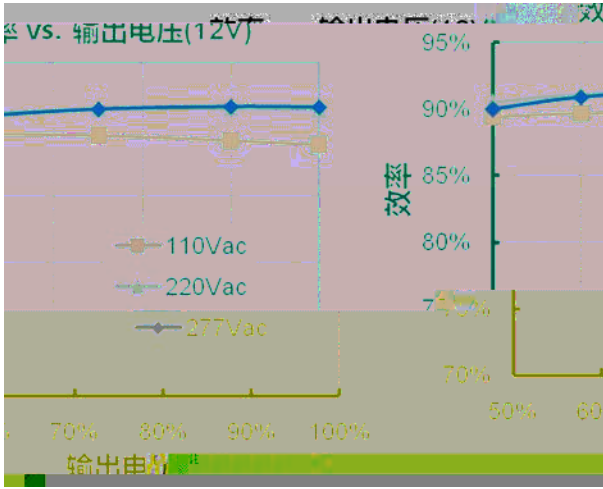


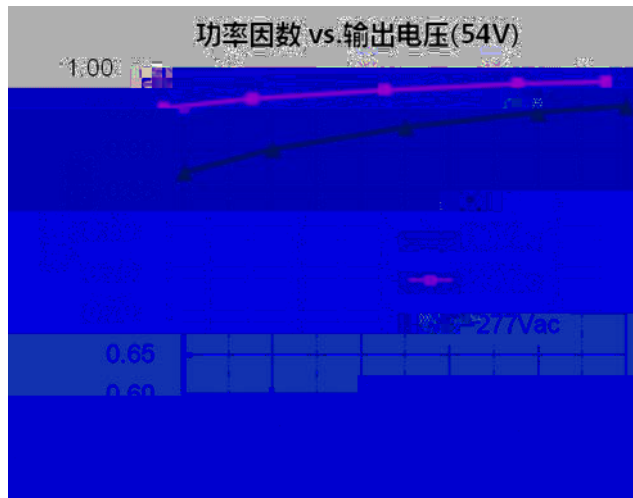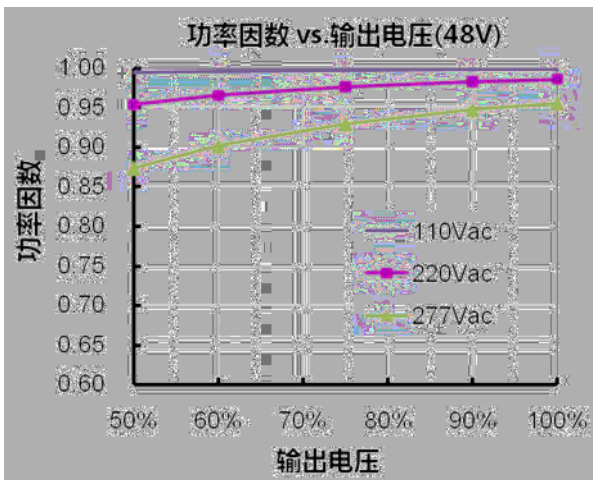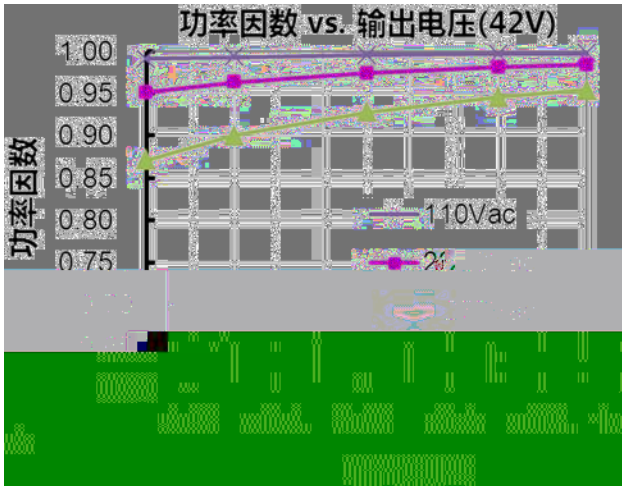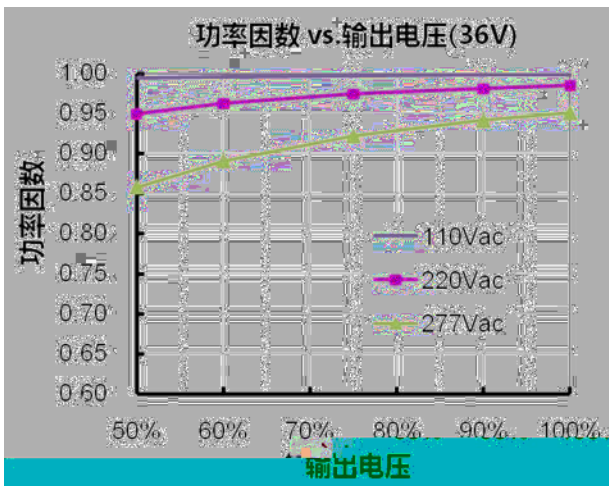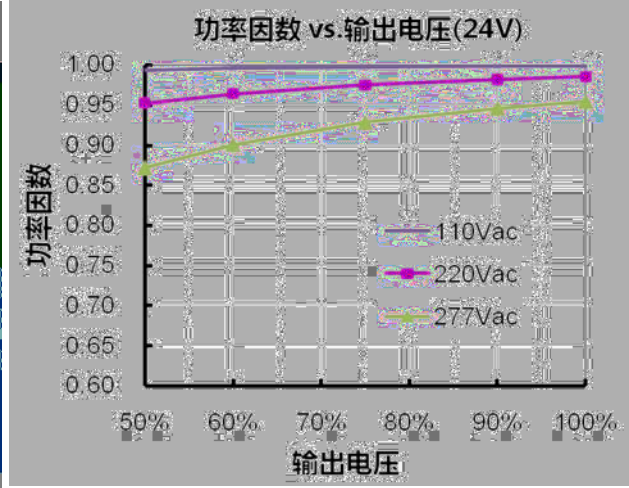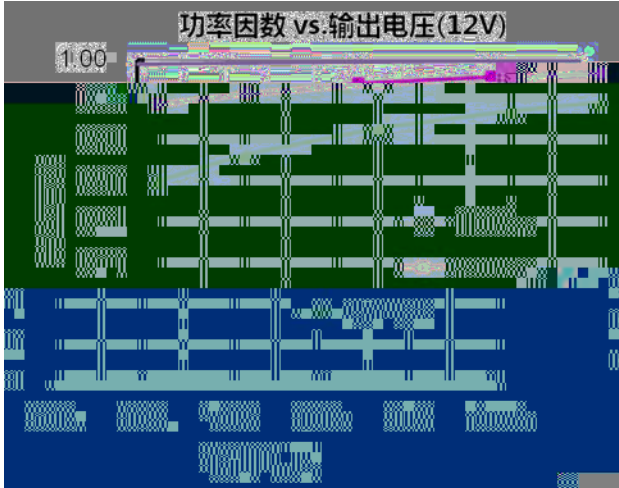

24V


	( )' % ♂	( +' % ♂	)'' % ♂	

EUV-200S012ST

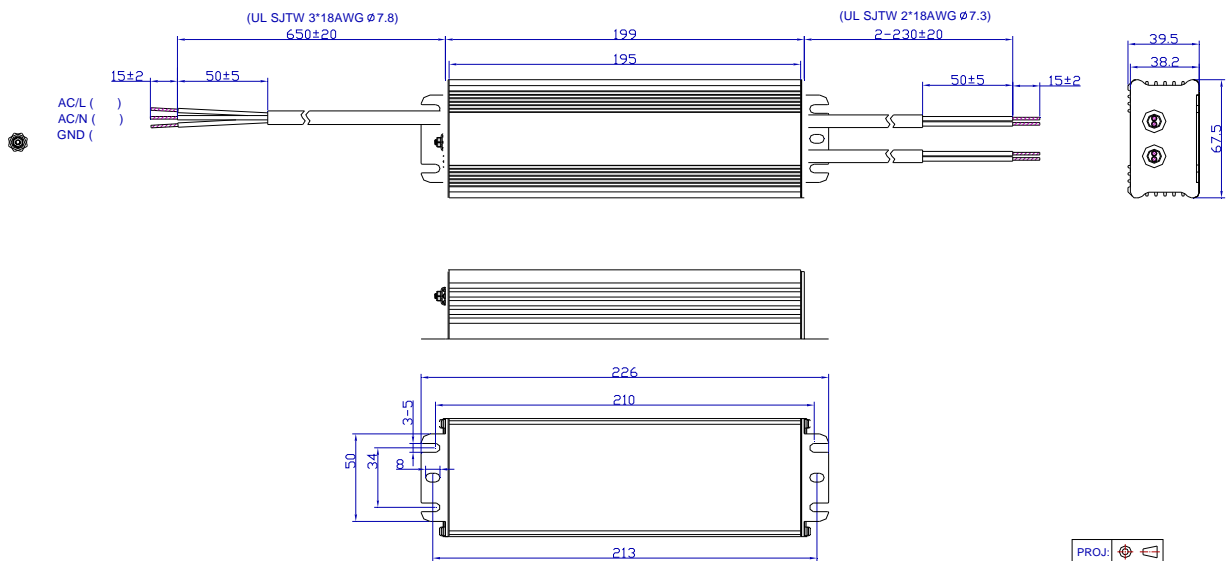

PROJ:  $\pm 1$

) 8N > (/# (' 8% )

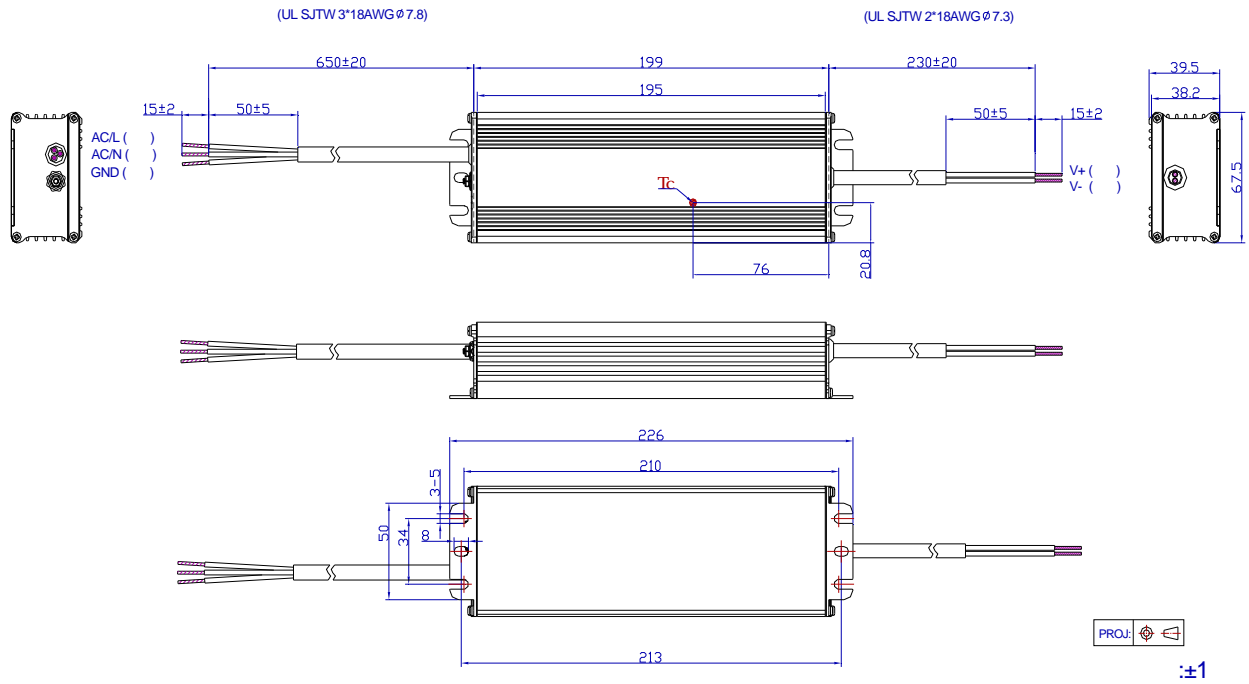

RoHS



2012-02-28	A		&		&	
2012-06-12	B	MF = +) M MF = , ' M MF = , ) M MF = / ( M MF = ( ' , M	&			
			' % j	( % j	' % j	( % j
			' % j	' % j	' % j	( % j
		<L M%) ' ' J' , +JK 7 (( ' Mac	&		( %	
		&				
2012-7-12	C		&			
2012-7-12	E		&		&	
2012-8-31	F	, +M 7 )) ' Mac	&		' %%	
		* - M	&		' %%	
			Typ 1.3lo	Max 1.7lo	Typ 1.4lo	Max 1.8lo
		D K9=	&			
		G= K? ;	&			
			&			
		D K9=	247,000 Hrs		200,000 Hrs	
		EN61000-4-5	line to line 2 kV, line to earth 4 kV		line to line 4 kV, line to earth 6 kV	
	&					
2012-12-06	G		) N		* N	
2012-12-28	H		&			
			&			
			&			
		) +M	&			
2013-11-26	I	—	, , % - ( ' ' %		( ' ' %	
2015-09-11	M		&			
			&			&

2015-09-11	M		&	
			&	
			<L M\$ ' ' J' +) JK	
			&	
			&	
			&	
			&	
			&	
2016-03-31	N	BJ	&	
			&	
			&	
2017-11-14	O		,	
		&		
			' %, %&:	' %, %&:
			&	
2019-03-12	P		&	
		\$	(' /' g	((, ' g
2020-01-06	Q	B: :	&	
			+bM# - bM	+bM# - bM

2020-01-06	Q		EN 55015 <sup>(1)</sup>	EN 55015/KN 15 <sup>(1)</sup>
			EN 61000-4-5	
			&	
		RoHS	&	
)' )(\$ . \$-	I		&	