



PU-20KS10KHT


LED


	100 Vac	-	277 Vac	
(MCOV) ⁽¹⁾	-	-	320 Vac	
	47 Hz	-	63 Hz	
(In) ⁽²⁾	-	-	10 kA	
(Imax) ⁽³⁾	-	-	20 kA	
(Uoc) ⁽⁴⁾	-	-	20 kV	
(L-N) ⁽⁵⁾	-	-	2600 V	10kA 8/20 μs
(L-G N-G) ⁽⁵⁾	-	-	2000 V	10kA 8/20 μs
	20 kA	1	-	
	10 kA	15	-	
	4 kA	100	-	
	2 kA	500	-	
	1kA	1000	-	
	-		50 g	-

- 1 (MCOV): SPD
- 2 (In) SPD 15 8/20μs SPD
- 3 (Imax) SPD 8/20μs SPD
- 4
- 1 (I) i 6 μ <
- Imax 20kA 8/20μs
- In 10kA 8/20μs

	-40 C	-	+85 C	
	-40 C	-	+85 C	≤ 75%RH
	-10 C	-	+40 C	≤ 75%RH

UL/CUL	UL 1449: Transient Voltage Surge Suppressors, CSA-C22.2 No. 269.5
IEEE C62.41	Guide on the Surge Environment in Low-Voltage (1000 V and Less) AC Power Circuits

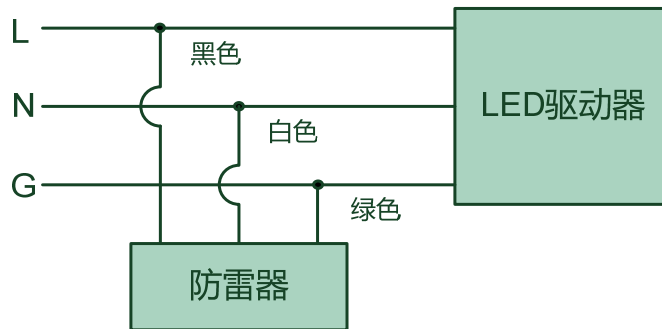

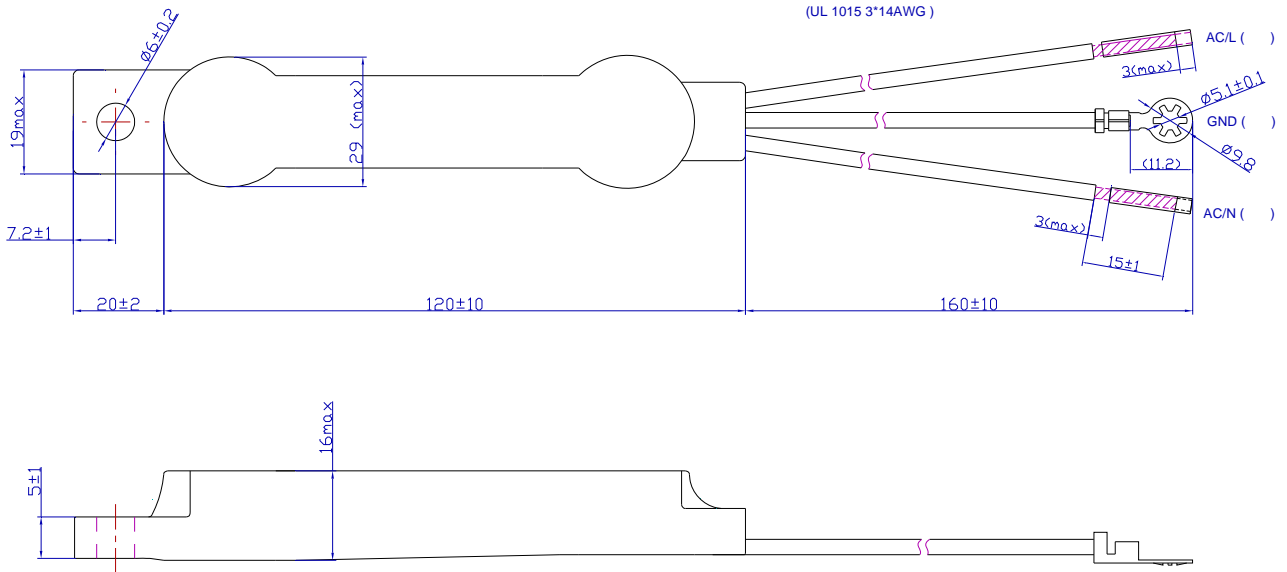

PROJ. :±1

2018-03-30	A	/	/	/
2018-04-20	B	/		
2018-08-28	C	/		